

No.SD411-WFDHB-DS (2nd)



## 3000 nits & 700 nits Window Facing High Brightness Display

### Window Displays (3,000 & 700cd/m<sup>2</sup>)

Brightness is the most factor when using outward facing screens, these displays use commercial-grade high brightness display panels (3000&700nits) more than 3 times brightness than digital signage, in order to allow easy visible in the window

### LED Backlight

Different from other forms of light, this technology can improve brightness and contrast, extend service life and reduce power consumption, and this technology does not contain mercury-free, so it is more environmentally friendly. The service life of the panel and backlight exceeds 60,000 hours.

### 24/7 Commercial Grade Optional

These displays use commercial-grade high-brightness display panels and LED backlights, can be used 24/7 for more than 60,000 hours, and have no external buttons or controls to avoid tampering

### Network Upgrade

For a small charge you can upgrade the screen to make it with network, allowing you to connect to the screen via WIFI, LAN or 4G, and then remotely update via the Internet

### Network CMS Upgrade

If needed, we also provide a cloud-based network CMS, and you can also run third-party digital signage software through the Android motherboard

### Plug & Play

Plug and play is the most straightforward way to upload content to the screen. Just load the images and videos onto the USB memory stick, insert the display, wait for the content to be copied to the menu, your images and videos will now be played continuously

### IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape portrait orientations



Sunlight  
Readable



24/7Us  
age



Landscape  
or Portrait



Android



HDMI input



Plug and  
Play



Fan-less  
design



4K  
resolution  
ratio

# Product Advantages

## Not afraid of sun reflection

Specialize for the street shop! 4K resolution makes perfect display performance with 3,000nits high brightness, it's the most powerful weapon for your retail store.




# Product Features



### Super Thin

Super slim thickness display Lightweight design

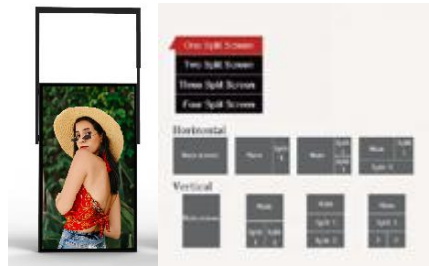

### Intelligent Display

Supports splitting the screen into multiple windows with different content being reproduced in each of them.

3000 nits




700 nits

### Window Displays (3,000 & 700cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (3,000 & 700cd/m²);



Adjustable hanging bracket length from 748mm ~1068mm.

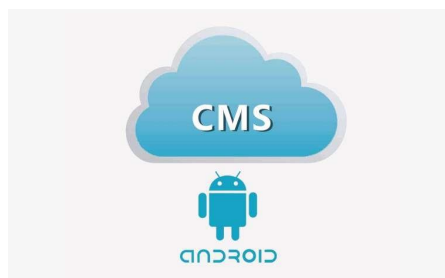

### Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.



### Plug & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

# Specification Sheet

Model No.		SD411-WFDHB-DS (2nd)		
Dual Panel	Display Size(inch)	43"	49"	55"
	Type	E-LED	E-LED	E-LED
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	941.2(H)x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio	16:09	16:09	16:09
	Brightness(cd/m2)	3000/700 nit	3000/700 nit	3000/700 nit
	Contrast Ratio(Typ.)	1000:1	1000:1	1000:1
	Viewing Angle(H/V)	178/178	178/178	178/178
	Color	16.7M	16.7M	16.7M
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)	6ms	6ms	6ms
	Operation Hour	24/7	24/7	24/7
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type	Internal	Internal	Internal
	Power Supply	AC 100 - 240 V ~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V ~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V ~ (+/- 10 %), 50/60 Hz
	BTU(Max)	525.14	562.65	637.67
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W
	Protection Glass	N/A	N/A	N/A
	Stand Type	Hanging	Hanging	Hanging
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity	10~80%	10~80%	10~80%
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® RK3288 (1.8GHz, Quad-core)	
		RAM	2G	
		Flash	8G EMMC	
		USB	USB2.0 HOST(X3)	
		LAN	10M/100M Ethernet(Network version screen only)	
		External memory	8GB SD card(up to 32G)	
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)	
		Media Resolution	1920*1080	
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)	
		Operating System	Android 7.1	
Certification	Safety	CE ROHS		
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance	1 Year 2-3 years (optional)		
	Type of packaging	Carton box /honeycomb box + wooden case		



**get  
service  
now**

[www.starvisualdisplay.com](http://www.starvisualdisplay.com)

**Shenzhen Starvisual Display Electronics  
Featured products including the covid-19  
solutions, window facing high brightness,  
Indoor digital signage, digital menu boards,  
LCD video wall, outdoor digital Signage,  
ultra-wide stretch bar display, interactive  
digital signage, double-sided advertising  
display, and All-in-one interactive  
whiteboard, etc.**

**Any  
Questions?**



**[info@starvisualdisplay.com](mailto:info@starvisualdisplay.com)**

To get the service & support today!